



# DIESEL TRANSFER SYSTEM "Cami Dispenser"




Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

<b>090-5070-060</b>	Cami Dispenser	<b>60</b>	230/50	460	F1" - F1"	20	Aut.PA60	3C	Contin.	26,00	505X355X425
<b>090-5070-070</b>	Cami Dispenser	<b>70</b>	230/50	552	F1" - F1"	20	Aut.PA60	3C	Contin.	27,00	505X355X425
<b>090-5070-100</b>	Cami Dispenser	<b>100</b>	230/50	805	F1" - F1"	25	Aut.PA120	4C	Contin.	33,00	505X355X425

<b>090-5070-07X</b>	Cami Dispenser	<b>70</b>	115/60	575	F1" - F1"	20	Aut.PA60	3C	Contin.	27,00	505X355X425
<b>090-5070-10X</b>	Cami Dispenser	<b>100</b>	115/60	977	F1" - F1"	25	Aut.PA120	4C	Contin.	33,00	505X355X425

<b>090-5070-Y60</b>	Cami Dispenser	<b>60</b>	12	336	F1" - F1"	20	Aut.PA60	3C	40	26,00	505X355X425
<b>090-5070-Z60</b>	Cami Dispenser	<b>60</b>	24	432	F1" - F1"	20	Aut.PA60	3C	40	26,00	505X355X425

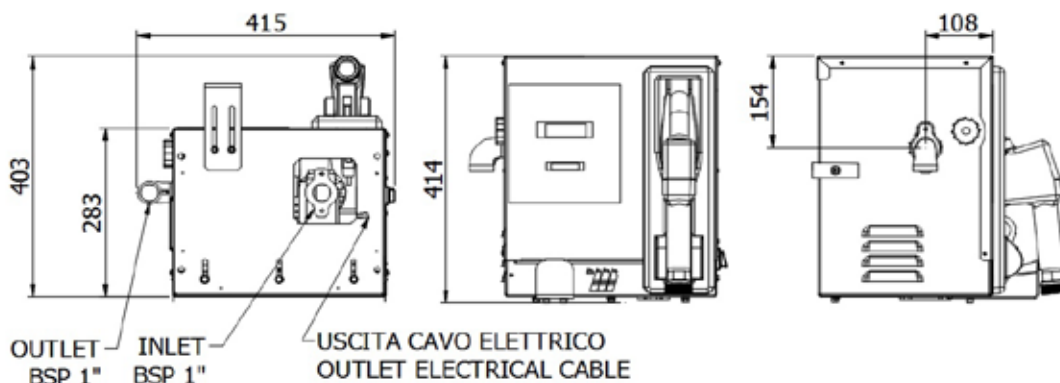

Diesel transfer system for private usage, it allows the quick and safe filling of vehicles, and permits to measure and record the dispensed quantities. It is equipped with nozzle holder, microswitch to turn the pump on/off, automatic nozzle with swiveling joint, and extractable hose support. The equipment can be fixed to the wall, to a tank or to its own support column.

### “Cami Dispenser” series composed by:



**Art. 091-5081-060** 12V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse- 60 l/min

**Art. 091-5083-060** 24V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and use carrier - 60 l/min



**Art. 091-5095-060** Electric pump 230V 50Hz 60 l/min

**Art. 091-5098-070** Electric pump 230V 50Hz 70 l/min

**Art. 091-5100-100** Electric pump 230V 50Hz 100 l/min



**Art. 091-5099-070** Electric pump 115V 60Hz 70 l/min

**Art. 091-5101-100** Electric pump 115V 60Hz 100 l/min



**Art. 908-0516-040** Connection hose ø 20 mm M-M 1” 4 m lenght

**Art. 908-0616-040** Connection hose ø 25 mm M-M 1” 4 m lenght



**Art. 093-5210-000** Automatic nozzle PA60 Flow rate 70 l/min

**Art. 093-5220-000** Automatic nozzle PA120 Flow rate 120 l/min



**Art. 092-5103-000** Mechanical flow meter 3 digits F1” 120 l/min - 3C

**Art. 092-5104-000** Mechanical flow meter 4 digits F1” 120 l/min - 4C

### OPTIONAL:



**Art. 090-5072-000** Support column Cami-Dispenser



**Art. 094-5240-000** Water separating delivery filter for diesel 70 l/min

**Art. 094-5245-000** Water separating delivery filter for diesel 150 l/min